



HX Series

130-140HP





MAIN FEATURES

- Powerful 130-140 hp engine
- 3.8 L common rail diesel engine
- 8 speed Powershift 8x2x2
- 32 forward 32 reverse
- 4853 kg unweighted tractor
- 118 L min rear hydraulic pump CCLS / 165.3 L min total
- LSD mechanical front axle
- Rear lift capacity of 4852 kg at lift point
- 5 pillar panoramic cabin



THE NEW STANDARD FOR UTILITY TRACTORS.

Kioti has entered its next chapter - a premium tractor with a luxurious design and extreme power thanks to top-of-the-line specs.

The ergonomically designed cabin reduces fatigue and maximises convenience for the driver. Ease of operation was at the forefront of development of the HX, so the electronic armrest and Powershift lever are conveniently located on the right-hand side. A premium passenger seat is a feature of the spacious cabin, creating an environment where comfort is the overriding priority.

The curved window shield meets the roof, providing maximum peripheral vision. This enables accurate and safe loader operation, as well as an incredible view from the cab. And that's just the beginning of the HX.



**THE LATEST IN INNOVATION
FROM SOUTH KOREA**

STANDARD FEATURES GIVE INCREASED USABILITY.

3 POINT LINKAGE




The electronic controlled 3-point linkage system boasts a 4852kg lifting capacity, allowing for the installation of multiple working implements.

ENGINE



Built with a 3.8L 4 cylinder diesel engine at either 130hp or 140hp, the HX achieves optimum engine performance, thereby increasing work productivity.

LOAD SENSING

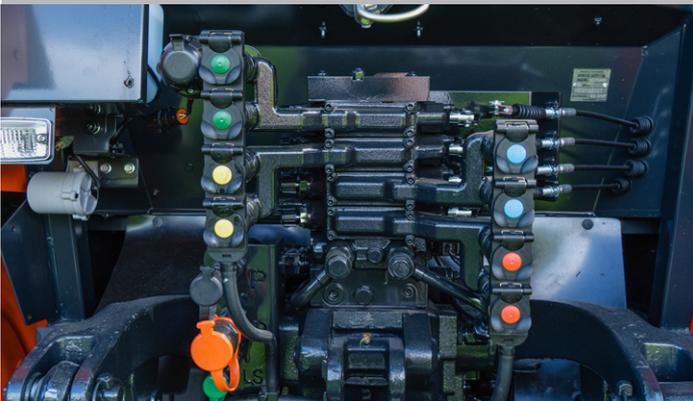

Load Sensing provides optimal hydraulic pressure and flow rate for load sensing operations. This results in automatically neutralising valves in the event of high loads during operation.

EXTERNAL CONTROLS



The addition of rear fender remote and PTO switches increases the convenience of both the removal and attachment of external implements.

LIMITED SLIP DIFFERENTIAL



The use of a LSD front axle prevents the occurrence of slippage due to the load difference of the front wheels. This creates traction, greatly aiding manoeuvrability in any conditions.

EASY ACCESS CAB



Large ergonomic cabin, with well placed instruments and features. Includes air suspension swivel seat, auxiliary seat with seatbelt, USB charging & numerous storage compartments.

SPACIOUS CABIN DESIGN PROVIDES INCREASED COMFORT.

MULTI-FUNCTIONAL ARMREST



The multi-functional electronic armrest features numerous functions, such as throttle engagement, 3-point linkage lift and lower, Powershift and Auto Powershift mode.

SUN ROOF



A transparent sunroof inside the cabin ensures an upward clear vision when using the loader, improving ease of operation and safety.

ADJUSTABLE STEERING COLUMN



Smooth handling thanks to the steering wheel angle/height adjustment setting creates an optimal driving position, improving workability, comfort, and easy access.

POWERSHIFT



A simple button operation on the side speed lever and armrest gives you a 32x32 transmission with an 8-speed Powershift in 4 ranges.

INTEGRATED LOADER JOYSTICK



The multi-functional loader joystick is built with 3rd service and Powershift buttons, simplifying loader working conditions for the user.

HYDRAULIC REMOTES



Changing or removing implements is light work on the HX, thanks to the four external rear hydraulic ports and one-handed quick couplers. Flow at the remotes is 118 L/min.



**INTUITIVE CONTROLS GIVE YOU THE
POWER YOU NEED WHEN YOU NEED IT**

SPECIFICATIONS

MODEL	HX1301 CAB	HX1401 CAB
ENGINE		
Model	4J243TI-TP2A	
Type	Kioti	
Engine Gross HP	130	140
PTO HP @2200RPM	109	120
Displacement cc	3833	
Rated Revolution rpm	2200	
Fuel Tank Capacity L	230	
DRIVE TRAIN		
Shuttle Type	Power Shuttle	
Main Shift	Powershift	
Speeds	32x32	
Hi-Low Range	Standard	
Hi-Creep Range	Standard	
Main Clutch	Wet Disc Clutch	
Brake	Wet Disc Type	
Differential Lock	Rear Standard	
PTO Type	Independent	
Rear PTO rpm	540/750/1000	
4WD Type	Hydraulic	
HYDRAULIC SYSTEM		
3 Point Lift Control Type	Electronic	
Total Hydraulic Flow L/min	165.3	
Implement Pump L/min	118	
Power Steering Pump L/min	47.3	
3-Point Hitch	Category II	
Maximum Lifting Capacity kg	4852	
Number of Remote Valves	4 (1x Float/Detent - 3x Spring Return)	
Joystick Valve	Standard	
Steering	Hydrostatic Power Steering	
TYRE SIZE		
Front Radial	420/70R28	
Rear Radial	520/70R38	
TRAVELLING SPEEDS		
Forward km/h	0.38 - 40.48	
Reverse km/h	0.37 - 40.20	
DIMENSIONS		
Overall Length (includes 3-pt hitch) mm	4518	
Overall Width (minimum tread) mm	2267	
Overall Height (from top of cab) mm	3011	
Wheel Base mm	2600	
Min Ground Clearance mm	496	
Tread	Front (AG.) mm	1854
	Rear (AG.) mm	1800
Min. Turning Radius (w/ brake) mm	4200	
Weight with Cab and Tyres kg	4853	



STANDARD EQUIPMENT

- Instructor seat
- Speed gauge
- PTO cruise
- Parking alarm
- Fridge and heating cabinet
- Drink holder
- Bluetooth radio
- A/C and heating
- Front fenders
- Working lights
- Sun roof
- Front and rear wipers

OPTIONAL EQUIPMENT

- Front weights
- Rear wheel weights
- LED light package
- Hydraulic Top Link

**TO CONTACT
YOUR LOCAL
DEALERSHIP**

**CALL
0800 627 222**